


# Xprinter®

Direct Thermal Barcode Printer


## XP-470B

- High quality double-walled clamshell design
- 203 dpi resolution models
- Head-up sensor
- USB 2.0
- 8MB SDRAM, 8 MB Flash

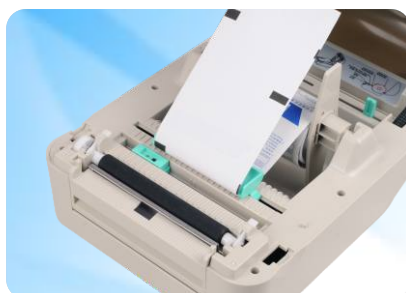

# XP-470B

## Direct Thermal Printer



<b>Model</b>	<b>XP-470B</b>
<b>Resolution</b>	203 DPI
<b>Print method</b>	Direct Thermal
<b>Print speed</b>	152mm(6'')/s Max.
<b>Max.print width</b>	108 mm (4.25'')
<b>Max.print length</b>	1778 mm (70'')
<b>Media</b>	
<b>Media type</b>	Continuous, gap, black mark, fan-fold and punched hole
<b>Media width</b>	25.4~118mm (1.0''~4.6'')
<b>Media thickness</b>	0.06 ~ 0.25 mm (2.36 ~ 9.8 mil)
<b>Media core diameter</b>	25.4~76.2 mm (1''~3'')
<b>Label length</b>	10~1778 mm (0.39''~70'')
<b>Label roll capacity</b>	127 mm (5'') OD (External diameter)
<b>Performance Features</b>	
<b>Processor</b>	32-bit CPU
<b>Memory</b>	8MB Flash Memory/ 8MB SDRAM/ Flash memory can be expanded Max.4Gb
<b>Interface</b>	Standard: USB TF card,      Optional: Serial/Lan/WIFI/Bluetooth
<b>Fonts/Graphics/Symbologies</b>	
<b>Internal fonts</b>	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.
<b>1D barcode</b>	Code 39, Code 93, Code 128UCC, Code 128 , subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST
<b>2D barcode</b>	PDF-417, Maxicode, DataMatrix, QR code
<b>Rotation</b>	0°、 90°、 180°、 270°
<b>Emulaion</b>	TSPL、 EPL、 ZPL、 DPL
<b>Physical Features</b>	
<b>Dimension</b>	240(D) x 212(W) x172(H)mm
<b>Weight</b>	1.58kg
<b>Reliability</b>	
<b>Warranty</b>	One year
<b>Print head</b>	30 km
<b>Software</b>	
<b>Driver</b>	Windows / Linux / Mac
<b>SDK</b>	Windows / Android / iOS
<b>Power supply</b>	
<b>Input</b>	DC 24V/2.5A (Printer input: DC 24V/2.5A)
<b>Output</b>	DC 24V, 2.5A, 60W
<b>Options</b>	
<b>Factory Options</b>	① Serial    ② Lan    ③ WIFI    ④ Bluetooth    ⑤ Peeling machine
<b>Dealer Options</b>	① External paper roll holder and 1 "paper roll ② Extension board for external paper roll holder ③ Shipment waybill box
<b>Environmental Conditions</b>	
<b>Operation</b>	5 ~ 40°C(41~104°F), Humidity: 25 ~ 85% non-condensing
<b>Storage environment</b>	-40 ~ 60°C(-40~140°F), Humidity:10 ~ 90% non-condensing



Scan QR code to checkout Xprinter website for more update information.  
Phone: (+86 756) 3895 852  
Http://www.xprintertech.com  
Email: overseas@xprinter.net

